



Van



Truck



Bus



Camper




SUV



COMPRESSED AIR HORN

LINE ACTC ACTC/2 INT 24V

Technical drawing

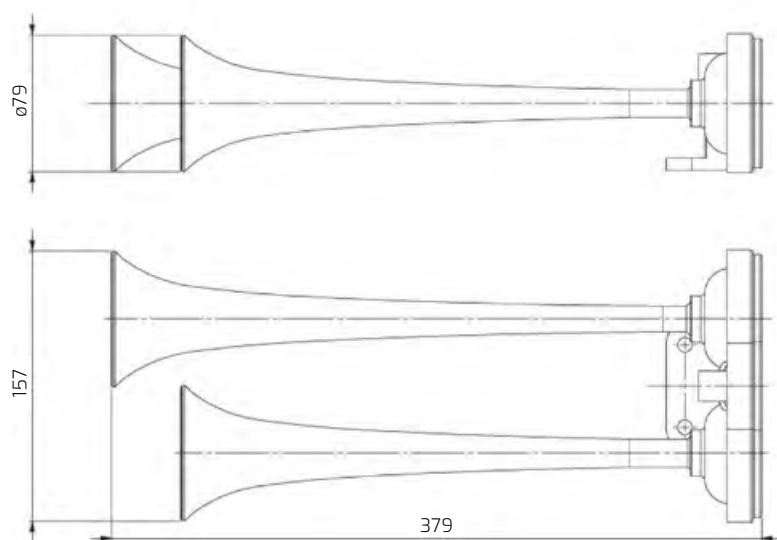

Connection

Electrical wires

LINE ACTC ACTC/2 INT 24V

Technical features

Nominal Voltage	Vcc	24
Voltage Range	Vcc	22,8÷27,6
Current Consumption	A	<0,5
Operating pressure	kPa	300 - 1200
Air consumption at 850 Kpa	Nl/1 min	<350
Sound Pressure Level (at 2 meters)	dB(A)	117
Frequency (High + Low Tone)	Hz	440 + 350
Durability (1" On + 4" Off)	cycles	>500.000
Corrosion resistance (UNI 9227)	h	>500
Operating and Storage Temperature	°C	from -30 to +80
Vibrations (30 min x 3 axis)	g	1
Weight with screws	gr	1.400

Packing

Single Packing Dimensions	mm	190 x 400 x 95 h
Master Carton Quantity	pcs	15
Master Carton Dimensions	cm	60 x 40 x 52 h
Master Carton Weight	kg	21

Mounting Instructions

ACTC horn

The horn must be fixed to a flat, rigid (possibly metallic) surface using the special brackets and screws supplied.

The horn must be installed in a position protected from:

- sprays of water generated by the movement of the vehicle or by washing systems.
- foreign bodies such as stones, insects, mud, snow, etc.
- excessive heat sources (above 80 °).

ATTENTION!

It is recommended to install the horn with the mouths slightly downwards in order to avoid the entry of foreign bodies (water, mud, insects, etc.) In the case of horizontal mounting of the horn, it is recommended to mount a special SPOILER.

