



Van



Truck



Bus



Camper



SUV




## ELECTROPNEUMATIC HORN


LINE PN PN/3P 24V

E3 28 E3 10

### Technical drawing

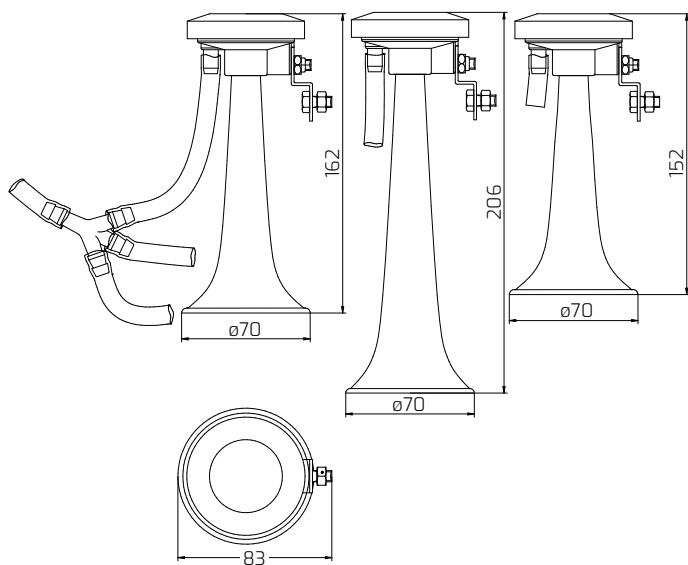

### Connection



# LINE PN PN/3P 24V

## Technical features

Nominal Voltage	Vcc	24
Voltage Range	Vcc	22,8÷27,6
Current Consumption	A	<10
Sound Pressure Level (at 2 meters)	dB(A)	115
Frequency (High + Medium + Low Tone)	Hz	800 + 750 + 600
Terminals (No. 2 Faston 6,3 x 0,8mm)	nr	2
Durability (1" On + 4" Off )	cycles	>50.000
Corrosion resistance (UNI 9227)	h	>192
Operating and Storage Temperature	°C	from -30 to +80
Electrical Insulation (at 1000Vcc)	MΩ	>10
Vibrations (30 min x 3 axis)	g	3
Weight including bracket	gr	900

## Packing

Single Packing Dimensions	mm	305 x 260 x 90 h
Master Carton Quantity	pcs	10
Master Carton Dimensions	cm	33 x 52 x 50 h
Master Carton Weight	kg	12

## Mounting Instructions

### PN/2P and 3P - ELECTROPNEUMATIC HORN

The compressor and the horns must be fixed to a flat, rigid surface (possibly metal) using the special brackets and screws supplied.

The horn must be installed in a position protected from:

- sprays of water generated by the movement of the vehicle or by washing systems.
- foreign bodies such as stones, insects, mud, snow, etc.
- excessive heat sources (above 80°) such as radiators, exhaust pipes, engines.

### ATTENTION!

It's recommended to install the trumpets and the electrical connection of the compressor pointing downwards.

