




## ACCESSORIES/SPARE PARTS LINE

# RELAY 12V RELAY 24V

E3 10

### Technical drawing

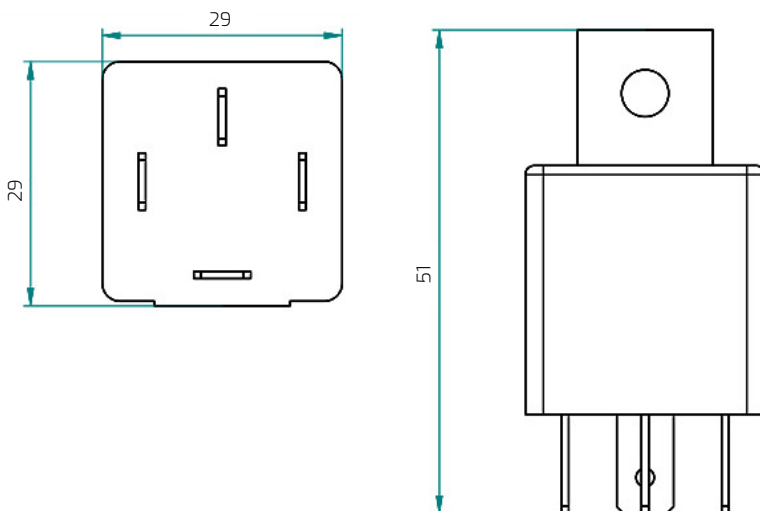

### Connection

4 plugs 6,3 x 0,8 mm

# RELAY 12V

# RELAY 24V

Technical features		12V	24V
Nominal Voltage	Vcc	12	24
Voltage Range	Vcc	11,4÷13,8	22,8÷27,6
Coil absorption	mA	<40	<20
Maximum capacity of normally open contacts	A	<30	
Terminals	nr	4/5	
Durability (1" On + 4" Off )	cycles	>100.000	
Operating and Storage Temperature	°C	from -40 to +85	
Electrical Insulation (at 1000Vcc)	MΩ	>10	
Vibrations (30 min x 3 axis)	g	3	
Weight	gr	35	

Packing		
Master Carton Quantity	pcs	500
Master Carton Dimensions	cm	40 x 38 x 15 h
Master Carton Weight	kg	13

## Mounting Instructions

### RELAY

Install the relay on a hard flat surface.

The relay must be installed in a location protected by:

- sprays of water generated by the movement of the vehicle or by washing systems.
- foreign bodies such as stones, insects, mud, snow, etc.
- excessive heat sources (above 80°) such as radiators, exhaust pipes, engines.

