


## ACCESSORIES/SPARE PARTS LINE


TR/EPQ 12V  
TR/EPQ 24V

CE

### Technical drawing

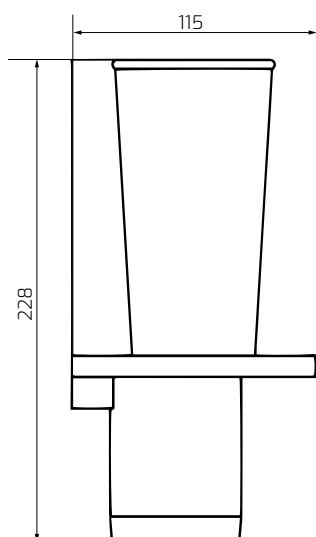

### Connection



# TR/EPQ 12V

# TR/EPQ 24V

Technical features		12V	24V
Nominal Voltage	Vcc	12	24
Voltage Range	Vcc	11,4÷13,8	22,8÷27,6
Current Consumption	A	<3,5	<2,5
Sound Pressure Level (at 2 meters)	dB(A)	102	
Frequency (High Tone)	Hz	520	
Terminals (No. 2 Faston 6,3 x 0,8mm)	nr	2	
Durability (1" On + 4" Off )	cycles	> 50.000	
Corrosion resistance (UNI 9227)	h	>192	
Operating and Storage Temperature	°C	from -30 to +80	
Electrical Insulation (at 1000Vcc)	MΩ	>10	
Vibrations (30 min x 3 axis)	g	1	
Weight including bracket and screws	gr	900	

Packing		
Single Packing Dimensions	mm	255 x 120 x 120 h
Master Carton Quantity	pcs	12
Master Carton Dimensions	cm	56 x 44 x 26 h
Master Carton Weight	kg	10

## Mounting Instructions

### TR/EPQ

The horn must be fixed to a flat, rigid (possibly metallic) surface using the appropriate screws supplied.

The horn must be installed in a position protected from:

- sprays of water generated by the movement of the vehicle or by washing systems.
- foreign bodies such as stones, insects, mud, snow, etc.
- excessive heat sources (above 80°) such as radiators, exhaust pipes, engines.

