



Truck



Bus



Forklifts




Cars



## ELECTRONIC HORN FOR REVERSE GEAR

### LINE B.U.A. BUA 12/80V

#### Technical drawing

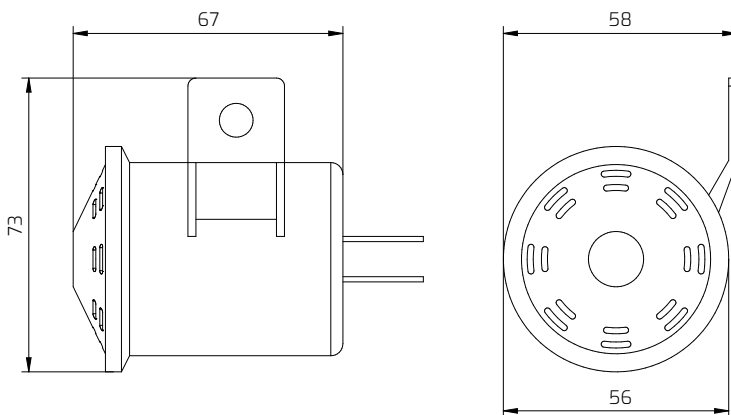

#### Connection

Electrical wires

# LINE B.U.A. BUA 12/80V

## Technical features

Nominal Voltage	Vcc	12÷80
Voltage Range	Vcc	10÷90
Current Consumption	mA	<30
Sound Pressure Level (at 2 meters)	db(A)	88
Fundamental frequency	Hz	3.000
Terminals (No. 2 Faston 6,3 x 0,8mm)	nr	2
Durability (1" On + 4" Off )	cycles	>1.000.000
Corrosion resistance (UNI 9227)	h	>192
Operating and Storage Temperature	°C	from -30 to +80
Electrical Insulation (at 1000Vcc)	MΩ	>10
Vibrations (30 min x 3 axis)	g	1
Weight including bracket and screws	gr	50

## Dimensioni imballo

Single Blister Dimensions	mm	105 x 95 x 70 h
N. Blister for Master Carton	pcs	30
Master Carton Dimensions	cm	35 x 30 x 23 h
Master Carton Weight	kg	2,5

## Mounting Instructions

### B.U.A.

The horn must be fixed to a flat, rigid.

The horn must be installed in a position protected from:

- sprays of water generated by the movement of the vehicle or by washing systems;
- foreign bodies such as stones, insects, mud, snow, etc.
- excessive heat sources (above 80°) such as radiators, exhaust pipes, engines.

