
Nautical



ELECTROMAGNETIC ACOUSTIC SNAIL HORN | ø80

LINE SEAWAVE L 24V

Technical drawing

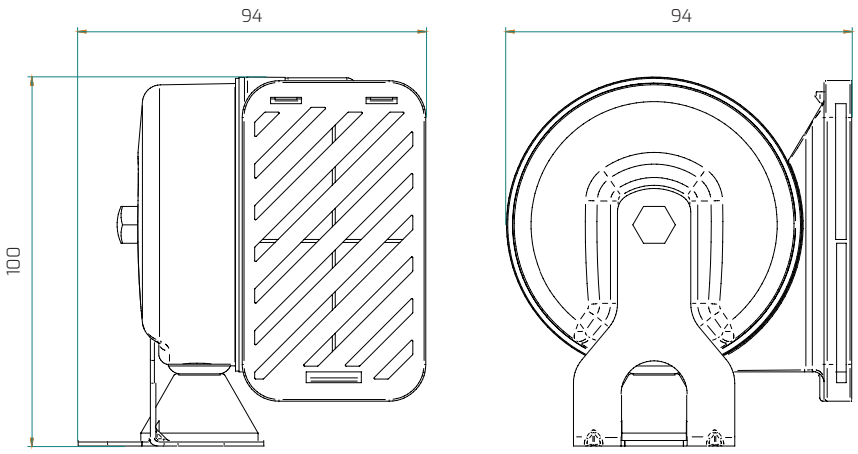

Connection

Electrical wires

LINE SEAWAVE L 24V

Technical features

Nominal Voltage	Vcc	24
Voltage Range	Vcc	22,8÷27,6
Current Consumption	A	<2,5
Sound Pressure Level (at 2 meters)	dB(A)	109
Frequency (Low Tone)	Hz	420
Terminals	nr	2
Durability (1" On + 4" Off)	cycles	>50.000
Corrosion resistance (UNI 9227)	h	>192
Operating and Storage Temperature	°C	da -30 a +80
Electrical Insulation (at 1000Vcc)	MΩ	>10
Vibrations (30 min x 3 axis)	g	3
Weight including bracket and screws	gr	305

Packing

Single Packing Dimensions	mm	135 x 110 x 85 h
Master Carton Quantity	pcs	40
Master Carton Dimensions	cm	56 x 44 x 26 h
Master Carton Weight	kg	15

Mounting Instructions

SEAWAVE horn

The horn must be installed in a vertical or horizontal position, in any case such that the mouth of the horn is facing downwards.

- The mechanical connection with the bracket and screws supplied must be carried out on a flat, rigid surface (possibly metal).

ATTENTION!

We recommend the utmost care in managing the installation phase, avoiding:

- falls to the ground of the horn which can lead to its misalignment or to cracks or breakages of the plastic parts.

L.E.B. S.p.A. | Via Antonio Pacinotti 34 – 36040 Brendola (VI)
Tel. 0444 400668 – Fax 0444 400829
infoleb@leb.it | *www.leb.it*

REV. 07/26